

AGM Light Traction

Technical data sheet








AF types

Technical features:

- VRLA battery (valve regulated battery technology) with AGM technology
- Maintenance-free (no topping up)
- Optimized chargers are available for all blocks

Standards & certifications:

- 300 cycles (XOS-types) / 450 cycles (XP-types) according IEC 60254-1


						
Nominal capacity 56.0 - 220 Ah C ₅ 60.8 - 240 Ah C ₂₀	Block battery	Grid plate	300 (XOS) / 450 (XP) cycles in accordance with IEC 60254-1	Recyclable	Valve regulated lead- acid batteries	Maintenance-free (no topping up)

Technical characteristics and data

Type	Nominal voltage V	Nominal capacity		Length (l) max. mm	Width (w) max. mm	Height (h) max. mm	Weight* kg	Terminal	Terminal position
		C ₅ (30 °C) Ah	C ₂₀ (30 °C) Ah						
AF 06 190 XOS	6	191	210	309	172	223	30.5	F-M6	1
AF 06 220 XP	6	220	240	260	181	274	32.9	F-M8	1
AF 08 165 XP	8	165	180	260	180	280	33.2	F-M8	3
AF 12 056 XOS	12	56.0	60.8	220	172	219	21.0	F-M6	3
AF 12 064 XOS	12	63.5	76.2	262	172	223	26.0	F-M6	3
AF 12 090 XOS	12	89.5	100	309	172	223	31.0	F-M6	3

* The weights may exhibit a tolerance of +/-5%

Drawings, terminal and torque

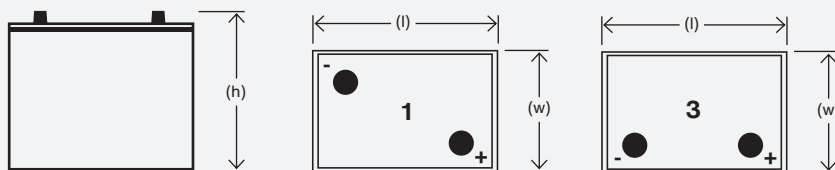

Not to scale!

