

COMMERCIAL VEHICLE BATTERY SOLUTIONS



BATTERIES THAT MEAN BUSINESS

High-performance batteries to keep your business moving

Logistics is more important than ever, with customers expecting faster and more predictable deliveries. In this competitive environment, fleet owners are focusing on total cost of ownership. After all, when a truck is off the road, it leads to customer dissatisfaction, unused labor and capital, and potential fines and penalties.

Fulmen designed its battery range to reduce the risk of breakdowns and give customers a competitive advantage. You get battery options for any use case, market-leading performance, lower total cost of ownership.

TRUSTED BY LEADING COMMERCIAL VEHICLE MANUFACTURERS

We have been supplying lead-acid batteries to car and truck makers for more than 130 years. We design the most technically advanced products in the industry, and were the first to introduce High Vibration Resistant (HVR®) batteries for trucks back in 2008. Vehicle manufacturers trust the quality of our products and our commitment to excellence in manufacturing.

EQUIPMENT ORIGINAL MANUFACTURER

Our company works with leading commercial vehicle manufacturers, including:
Isuzu, Iveco, MAN, Nissan, Renault Volvo Trucks, Scania, Bobcat, Case, Claas, SAME Deutz-Fahr, Evobus, John Deere,
Komatsu, New Holland, Wacker Neuson, and many others...



SELECT THE RIGHT FULMEN BATTERY FOR YOUR NEEDS

As a true expert in OE batteries, Fulmen helps you select the right battery. For fleet owners and installers alike, it is vital to make the right choice for the conditions of use. Three important criteria to consider in battery performance are: vibration resistance, cycling endurance and cranking power.

THREE MAIN FACTORS WHEN SELECTING THE RIGHT BATTERY



VIBRATION RESISTANCE

For trucks with rear-chassis battery installations (e.g. Euro 5/ Euro 6 trucks), robust and high vibration-resistant batteries are mandatory to avoid breakdowns. Vibration resistance is also required for any vehicle operating on bad roads or rough terrain.



CYCLING ENDURANCE


High cycling endurance is important in batteries for long-haul trucks with life on-board, commercial vehicles doing intensive urban deliveries, and any commercial vehicle with extensive energy requirements. This maximizes battery lifespan and ensures a safe battery start.



CRANKING POWER

High cranking power allows for engine starts in cold climates and is required from many agriculture and construction vehicles with reliable starting power requirements.

THE PERFECT BATTERY FOR EVERY NEED

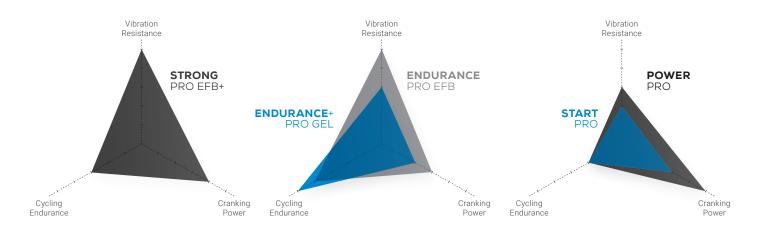



RANGE OVERVIEW & FEATURES

VIBRATION RESISTANCE						
CYCLING ENDURANCE						
CRANKING POWER						
CHARGE ACCEPTANCE						
MAINTENANCE	Free	Low	Free	Free	Free	Low

BATTERY RECOMMENDATION BY VEHICLE TYPE & APPLICATION

TYPE OF VEHICLES	APPLICATION	STRONG PRO EFB+	ENDURANCE PRO EFB	ENDURANCE+ PRO GEL	POWERPRO	POWERPRO AGRI & CONSTRUCTION	STARTPRO
Long-haul modern trucks, standard trucks	REAR-CHASSIS INSTALLATION / ROUGH TERRAIN, HIGH VIBRATIONS	~	1				
Express delivery (lifters), city bus	POWER-HUNGRY EQUIPMENT, DEEP CYCLING APPLICATIONS	~		√ ²			
Long-haul modern trucks	OVERNIGHT STOP / HOTEL FUNCTION	~	\ 1				
Standard trucks or vehicles with large/highly compressed engines	EXTREME CLIMATE AND/ OR HIGH CCA REQUIREMENTS				~		
Tractors, construction machines	SPECIAL VEHICLES					✓ 3	
Standard trucks	STANDARD REQUIRMENTS / OLDER VEHICLE						√ 3

NOTES

- \bullet Please top up the battery with distilled water if needed
- The charging system must be compatible with Sb/Ca alloy If these conditions are not met, choose the **STRONG PRO EFB+**

2

ENDURANCE+ PRO GEL requires charging voltage limitation to max 14,4V. If not compatible, choose the **STRONG PRO EFB+**

3

Top up with distilled water when needed (depending on battery model)

STRONGPRO EFB+





Fulmen's Strong battery is now "EFB+".

Fulmen's StrongPRO battery range is now stronger than ever. A new carbon-based formula of negative active mass enhances the rechargeability and charge acceptance of StrongPRO EFB+ battery. Additionally, the HVR® (high-vibration-resistant) technology enables StrongPRO EFB+ to pass the extreme vibration tests under the new European V4 standard (EN 50342-1:2015).

A more robust and more lasting battery means reduced total service cost for fleet owners and truck drivers, allowing less replacements over vehicle's service life and minimized risk of unexpected and premature battery failure.

RECOMMENDED TYPE OF VEHICLES / USE CONDITIONS:



Long-haul modern/ standard trucks with rear chassis installations and/or «hotel functions», express delivery and city bus. Ideal for vehicle running on rough terrain, with power hungry equipment and deep cycling applications.

Benefits

- · Better rechargeability and charge acceptance than previous generation StrongPRO NEW
- · Better control over gassing and stronger anti-stratification effect NEW
- Extremely robust with HVR® technology, meeting V4 requirements

REAR CHASSIS





SUPERIOR

(10=

- Up to 70% savings on TCO within 2 years period when compared with standard batteries
- Maximum starting reliability after overnight stay
- OE experience inside
- First class safety features
- Maintenance free no topping up




*Latest generation of Fulmen's leading HVR® design, meeting V4 requirements (EN 50342-1:2015)

HVR® TECHNOLOGY

New features in the robust battery design


Several economic factors (higher fuel costs, higher road taxes, higher toll & parking charges, and higher charges to enter low emission zones) have led fleet owners to upgrade by purchasing new Euro 5 or Euro 6 vehicles, thus reducing particulate matter and NOx emissions.

Many Euro 5/Euro 6 vehicles have a new chassis layout to integrate the Selective Catalytic Reduction (SCR) system and AdBlue tank, leading truck manufacturers to move batteries into the rear-chassis position.



NEW THREE AXIS TEST


HVR technology allows batteries to pass the strict V4* vibration test, which uses three-axis motion simulating real-life conditions.




SINGLE AXIS TEST

The V1-3 tests used single-axis vibration only.

EMISSION STANDARDS AS DEFINED BY EU DIRECTIVES





New challenges, new solution

The lifespan of ordinary batteries is greatly reduced by higher vibrations at the rear of the chassis of the vehicle. In 2016 we worked with truck manufacturers to develop the new High Vibration Resistant (HVR®) battery in the market, one of the first to meet the new V4* vibration test.

HVR guarantees a longer battery lifespan even when installed in the rear chassis of a truck.

* EN50342-1

THE CARBON BOOST® EFFECT

Our smart electrochemical solution for longer battery life.

Early battery failures are common in commercial vehicles, caused by exposure to deep discharge conditions. Challenges to the battery include frequent starting and stopping for urban deliveries, and overnight heating and lighting for long-haul trucks. This strain leads to sulphation and acid stratification, damaging battery lifespan.


With Carbon Boost™, unique carbon additives increase the speed at which sulphate particles dissolve. This leads to faster recharging, protection from sulphation and less stratification.

The carbon additives also promote controlled gassing during recharging, which keeps the electrolyte mixed and further reduces stratification

The benefits of Carbon Boost:

- Improved charge acceptance
- Faster recharging
- Reduced acid stratification
- Enhanced cycling endurance

Sulphation: Lead sulphate particles progressively cover the negative plates. This makes recharging less efficient, because energy is used to dissolve the lead sulphate.



WITHOUT CARBON BOOST®

The plates are covered with sulfate



WITH CARBON BOOST®

Sulfate is reduced due to Carbon Boost technology

Acid stratification: Sulphate particles turn into sulphuric acid during charging. This is heavier than the electrolyte, so it sinks to the bottom, creating a range of negative effects, including reduced capacity



WITHOUT CARBON BOOST®

Sulphuric acid sinks to the bottom of the cell



WITH CARBON BOOST® Controlled gassing mixes the electrolyte

and reduces stratification



ENDURANCEPRO EFB

Fulmen's top cycling battery is now indestructible

Fulmen's EndurancePRO range evolves: the "made for severe cycling" battery range features the innovative HVR® (High Vibration Resistance) design, that assures an incomparable level of robustness and minimized risk of unexpected and premature battery failure. Not only it guarantees excellent cycling performances and reduced stratification: the new EndurancePRO EFB battery now exceed the highest requirements in the industry's reference vibration test (V4 level in EN50342-1 vibration test) and it is perfectly adapted to be installed into vehicles running on rough terrain.

All this means less risk of breakdowns, more starting reliability and longer lifespan.

RECOMMENDED TYPE OF VEHICLES / USE CONDITIONS:





Long-haul modern/ standard trucks with rear chassis installations and /or hotel functions. Ideal for vehicle running on rough terrain. It requires water topping.

Benefits

- Extremely robust Now with HVR® technology, meeting V4 requirements NEW
- Perfect for deep cycling applications : 2x more cycle life compared to standard truck battery (advanced SHD technology with glass matt layers pasted on active mass) allowing excellent cycling performance (up to 200 cycles at 50% DoD)
- Improved durability
- OE experience inside























ENDURANCE+PRO GEL

Out-performing state-of-the-art technology

We are the inventor of Gel technology, the ultimate choice for the most demanding commercial vehicles applications.

Instead of being in liquid form, the electrolyte is fixed in a gel. This leads to unmatchable cycle life. The new Fulmen Endurance+PRO GEL battery is highly robust, with best-in-class deep cycle properties. It allows unmatched safe depth of discharge of 90%, which improves Total Cost of Ownership (TCO) and minimizes the risk of breakdowns.

RECOMMENDED TYPE OF VEHICLES / USE CONDITIONS:



Express delivery trucks and city bus with power hungry equipment and deep cycling needs.

Benefits

- Impressive energy throughput over the battery lifetime: safe DoD of 90%, vs 50% of standard flooded batteries, and 5 times more cycles than a comparable standard flooded battery
- Withstands deep discharges for maximum reliability
- Valve regulated: maximum safety and highly vibration resistant
- Very low self discharge
- Maintenance free
- Designed for OE applications



















MORE INFORMATION

The new Endurance+PRO GEL battery is the most effective and efficient option compared to any other VRLA battery. In fact, it cycles more and has 90% safe DoD (compared to 75% of any other VRLA battery), which means more energy available over time, leading to a minimized TCO.

POWERPRO

Impressive power at every start

RECOMMENDED TYPE OF VEHICLES / USE CONDITIONS:

Standard trucks or vehicles with large/highly compressed engine working in extreme climate and/or high CCA requirements.

Benefits

- Superior cranking power (more plates and active material to maximize grid surface)
- Robust and reliable design with hot melt fixation of plate groups
- Maintenance free no topping up
- OE experience inside












POWERPRO AGRI & CONSTRUCTION

Choose the original part

RECOMMENDED TYPE OF VEHICLES / **USE CONDITIONS:**

Tractors and construction machines (agriculture, forestry



Benefits

- Superior cranking power (more plates and active material to maximize grid surface)
- Robust design with hot melt fixation of plate groups
- Wide range including special types
- True OE design and construction (original part)



Maintenance Free - no topping up











STARTPRO

Reliable starting power for standard use

RECOMMENDED TYPE OF VEHICLES / USE CONDITIONS:

Strandard truck without specific vibration, cycling or cranking needs.



Benefits

- Ideal for trucks without special requirements in terms of vibration resistance, cycling or cranking power
- Robust and reliable design with hot melt fixation of plate groups
- Complete range covering almost 100% of vehicle parc, including special types



Low maintenance - may need water topping up





TYPE LIST Performance Dimensions **Technical Characteristics** CODE CCA Capacity L (Mm) W (Mm) Polarity H (Mm) Hold down Box FE1403 140 800 513 223 189 ETN 3 B0 D04 FF1853 185 1100 513 223 FTN 3 RΩ D05 **STRONGPRO EFB+** 223 FE2353 235 1200 518 240 279 ETN 3 В0 D06 180 513 BO D05 FX1803 1000 223 223 ETN 3 **ENDURANCE**PRO EFB FX2253 225 1150 518 240 279 ETN 3 B0 D06 FD2103 210 1030 518 240 279 ETN 3 ВО D06 518 240 279 ВО D06 ENDURANCE+PRO GEL FD2103T 210 800 ETN 3 В1 FF1202 120 870 349 235 175 ETN 0 D02 FF1420 142 850 349 290 175 FTN 0 ВО D03 850 175 ВО FF1421 142 349 290 ETN 1 D03 **POWER**PRO FF1453 145 900 513 223 189 ETN 3 B0 D04 185 223 ETN 3 ВО D05 FF1853 1150 513 223 235 518 279 ETN 3 ВО FF2353 1300 240 D06 FJ050C 50 800 260 206 173 ETN 1 В7 G34 FJ110B 110 950 330 240 173 ETN 9 ВО G31 110 900 349 235 175 ETN 0 В1 D02 FJ1102 110 175 ETN 0 FJ1100 900 235 ВО D02 349 FJ1000 100 850 353 190 175 ETN 0 B13 L05 FJ165A 165 850 354 285 241 ETN 6 В0 D67 **POWER**PRO ВЗ FJ1805 180 1000 510 225 218 FTN 3 D09 AGRI&CONSTRUCTION ВО FJ1523 152 513 189 D04 1130 223 ETN 3 FJ1723 172 1390 513 223 223 ETN 3 B0 D05 ВЗ FJ1355 135 1000 514 210 175 ETN 3 DB8 FJ2353 235 1450 518 240 279 ETN 3 B0 D06 FG110B 110 1000 330 240 173 ETN 9 ВО G31 ETN 0 FG1100 110 750 349 235 175 B₀ D02 175 RΩ FG1101 110 750 235 D02 349 FTN 1 FG1102 110 750 349 235 175 ETN 0 В1 D02 FG1250 125 760 349 290 175 ETN 0 B0 D03 FG1251 125 760 349 290 175 ETN 1 ВО D03 FG145A 145 1000 240 253 FTN 6 BO F21 360 ВЗ FG1008 100 680 413 220 175 ETN 0 D01 175 FG1109 110 800 413 220 ETN 1 ВЗ D01 FG1402 140 900 508 205 175 ETN 0 В1 ATM FG1206 120 680 510 225 175 ETN 4 ВЗ D08 **START**PRO FG1406 140 800 510 225 175 ETN 4 ВЗ D08 FG1806 180 1000 510 225 218 ETN 4 ВЗ D09 FG1203 120 680 513 223 189 ETN 3 ВО D04 189 ВО 140 800 513 223 FTN 3 D04 FG1403 FG1553 155 900 513 223 223 ETN 3 B0 D05 FG1803 180 513 223 ETN 3 ВО D05 223 FG1355 135 1000 514 210 175 ETN 3 ВЗ DB8 FG1353 135 1000 514 210 218 ETN 3 ВО DB9 FG1705 218 ВЗ DB9 170 950 514 210 ETN 3 FG2153 215 1200 518 240 279 ETN 3 ВО D06 FG2154 215 1200 518 240 279 ETN 4 ВО D06

MORE INFORMATION

Fulmen has the most comprehensive fitment list on the market. The list is constantly updated to include the latest vehicles, so you will always find the right battery for your vehicle. Contact your local Fulmen sales representative to request a paper copy or visit www.exide.com to view our online catalogue.

App Store

Google Play


You can also download the FREE Exide Battery Finder app to access fitment information on the go.

Fulmen® is a leading battery brand of Exide Technologies. **Exide Technologies**, with operations in more than 80 countries and more than 130 years of experience, is one of the world's largest producers and recyclers of lead-acid batteries. The company develops state-of-the-art energy storage solutions for the automotive and industrial market. Leading car, truck and lift truck manufacturers trust in Exide Technologies as an original equipment supplier. Exide also serves the aftermarket through a portfolio of successful and well-known brands.

Exide Transportation manufactures batteries for light and commercial vehicles, as well as agricultural and marine leisure applications. Industrial markets – under the division **GNB Industrial Power** – include efficient energy storage solutions for motive power applications such as lift trucks, cleaning machines and other commercial electrical vehicles, and network power applications such as telecommunications systems, renewables, and uninterruptible power supply (UPS).

Exide's engineers have always been at the forefront of bringing important innovations to the industry. Exide's IATF 16949 certified manufacturing facilities ensure that customers receive products that are produced with maximum efficiency and fulfill the highest quality standards, while minimizing impact on the environment.





Manufacturing plants

Recycling plants

Distribution centers

Main sales offices

R&D centres

Manufacturing plants ISO 9001 and ISO 14001 certified
Automotive plants IATF 16949 certified

EMEA HEADQUARTERS

EXIDE TECHNOLOGIES SAS 5 ALLÉE DES PIERRES MAYETTES 92636 GENNEVILLIERS FRANCE

TEL: +33 1 41 21 23 00 FAX +33 1 41 21 27 15



