

## **Product overview**




Batteries for Trucks, Buses, Construction, Agriculture

## StartPRO EG1203



Part number EG1203 Technology Flooded EAN/GTIN 3661024036993 Voltage 12 V Capacity 120 Ah CCA 680 A Length 513 mm Width 189 mm Height 223 mm Box size D04 Polarity ETN 3 Terminal Type EN taper post Hold Down B0 Weights (subject of variation)		
EAN/GTIN 3661024036993  Voltage 12 V  Capacity 120 Ah  CCA 680 A  Length 513 mm  Width 189 mm  Height 223 mm  Box size D04  Polarity ETN 3  Terminal Type EN taper post  Hold Down B0  Weights (subject of 32.50 kg	Part number	EG1203
Voltage 12 V Capacity 120 Ah CCA 680 A Length 513 mm Width 189 mm Height 223 mm Box size D04 Polarity ETN 3 Terminal Type EN taper post Hold Down B0 Weights (subject of 32.50 kg	Technology	Flooded
Capacity 120 Ah  CCA 680 A  Length 513 mm  Width 189 mm  Height 223 mm  Box size D04  Polarity ETN 3  Terminal Type EN taper post  Hold Down B0  Weights (subject of 32.50 kg	EAN/GTIN	3661024036993
CCA 680 A  Length 513 mm  Width 189 mm  Height 223 mm  Box size D04  Polarity ETN 3  Terminal Type EN taper post Hold Down B0  Weights (subject of 32.50 kg	Voltage	12 V
Length 513 mm  Width 189 mm  Height 223 mm  Box size D04  Polarity ETN 3  Terminal Type EN taper post  Hold Down B0  Weights (subject of 32.50 kg	Capacity	120 Ah
Width 189 mm  Height 223 mm  Box size D04  Polarity ETN 3  Terminal Type EN taper post  Hold Down B0  Weights (subject of 32.50 kg	CCA	680 A
Height 223 mm  Box size D04  Polarity ETN 3  Terminal Type EN taper post Hold Down B0  Weights (subject of 32.50 kg	Length	513 mm
Box size D04  Polarity ETN 3  Terminal Type EN taper post  Hold Down B0  Weights (subject of 32.50 kg	Width	189 mm
Polarity ETN 3  Terminal Type EN taper post  Hold Down B0  Weights (subject of 32.50 kg	Height	223 mm
Terminal Type EN taper post Hold Down B0 Weights (subject of 32.50 kg	Box size	D04
Hold Down B0 Weights (subject of 32.50 kg	Polarity	ETN 3
Weights (subject of 32.50 kg	Terminal Type	EN taper post
	Hold Down	B0
	-	32.50 kg

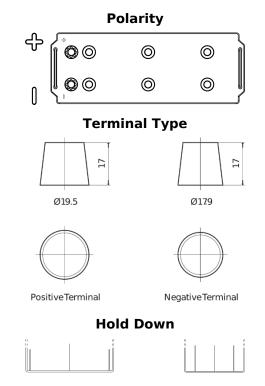

Design, features and specifications are subject to change without notice. We disclaim any representation or warranty, express or implied, concerning the data or recommendations, and in no event shall be liable for any loss or damage claimed to have arisen as a result. Some products may not be available in your local market.